


TEKNOTESSERE / colours


teknotessere bianco teknotessere cemento teknotessere cenere teknotessere black teknotessere fango

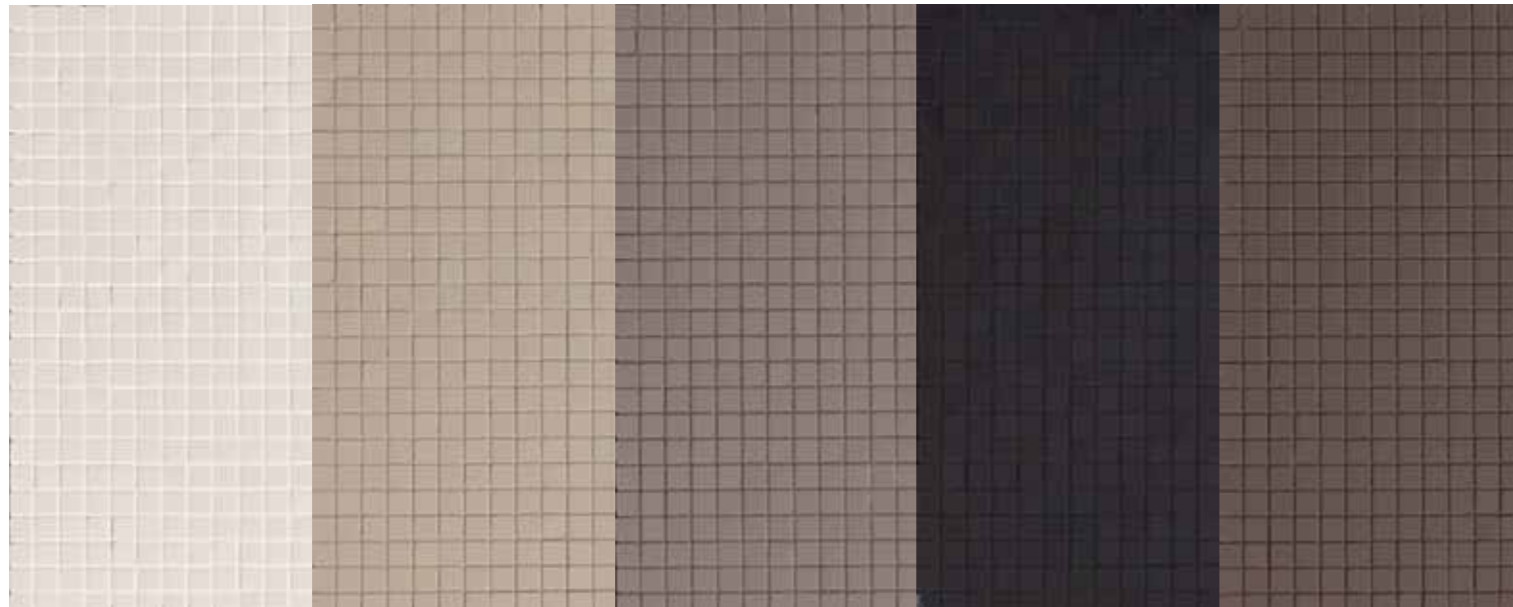

TEKNOTESSERE / technical features and packing

| norma standard | caratteristiche features | valore prescritto value required | teknotessere |
|---------------------|--|---|----------------------|
| ISO 10545/3 | assorbimento d'acqua water absorption | $E \leq 0,5\%$ | 0,07% |
| ASTM C373 | | | 0,07% |
| ISO 10545/9 | resistenza agli sbalzi termici resistance to thermal shock | nessuna alterazione visibile no visible alteration | resiste resistant |
| ASTM C484 | | unaffected | unaffected |
| ISO 10545/12 | resistenza al gelo frost resistance | nessuna alterazione visibile no visible alteration | resiste resistant |
| ASTM C1026 | | unaffected | unaffected |
| ISO 10545/13 | resistenza agli attacchi chimici resistance to chemical attacks | nessuna alterazione visibil no visible alteration | resiste resistant |
| ASTM C650 | | unaffected | unaffected |
| ISO 10545/14 | resistenza alle macchie stains resistance | classe 3 min. | classe 5 |

| formato | pz-mq pcs-sqm | pz-scat. pcs-box | mq-scat. sqm-box | scat.pal. box-pal. | kg-scat. kg-box | kg-pal. kg-pal. | mq-pal sqms-pal |
|---------|------------------|---------------------|---------------------|-----------------------|--------------------|--------------------|--------------------|
| 30-30 | 11,11 | 11 | 0,99 | 36 | 12,40 | 447 | 35,64 |

 V1
variazione uniforme
uniform variation